


Salamander Bulk Material Suction and Delivery Floating Hose

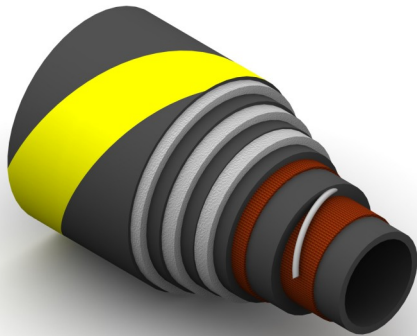

Construction:

Tube: Black SBR/NR Blend, Abrasion Resistant.

Reinforcement: High Tensile Textile Cords with Embedded Steel Helix Wire.

Intermediate Cover: Black IR/BR Blend;

Flotation Element: 3 Layers of PE Foam.

Cover: Black IR/BR Blend, Abrasion, Ozone and Hydrocarbon Resistant.

Temperature Range: -35°C To +85°C.

Typical Application: Bulk Material Delivery. Specially designed for heavy duty Barite and Cement delivery to offshore platforms.

Suitable for media of up to specific gravity of 1.6g/cm³

Minimum Reserve Buoyancy of 25% Using GMPHOM Standard Calculations For All hose.

Note: Finished Hose Dimensions May Be Subject To Change Depending On Specific Gravity of Medium Transported.

Branding:

Continental ContiTech BULK MATERIAL S&D 20 Bar WP

Black text on a Yellow stripe

Technical Data:

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		Bar	PSI	Bar	PSI		
BM20HFL-064	102	4	205	20	300	80	1200	550	12.40
BM20HFL-080	127	5	235	20	300	80	1200	700	15.30

Dunlop Oil & Marine Ltd
 Jubilee Industrial Estate
 Ashington, Northumberland
 NE63 8UB United Kingdom
www.dunlop-oil-marine.co.uk



The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.
 For complete information go to:
www.contitech.de/discl_en