


# DO10H Fuel and Oil Suction and Delivery Hose

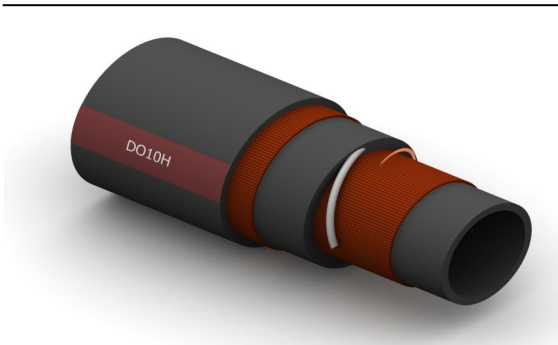

## Construction:

**Tube:** Black NBR.

**Reinforcement:** High Tensile Textile Cords with Embedded Steel Helix Wire And Antistatic Wire.

**Cover:** Black CR/BR Blend; Abrasion, Ozone and Hydrocarbon Resistant.

**Temperature Range:** -30°C To +100°C.

**Typical Application:** Fuel Oil Suction and Delivery, with up to 50% Aromatic Content, suitable for Seawater, Mud and general offshore applications, long lasting in heavy duty applications.

## Branding:

**Continental ContiTech DO10H OIL SUCTION & DELIVERY WP 10 BAR**

White text on a Brown stripe

## Technical Data:

Part No	Inside Dia		O.D. mm	Working Pressure		Minimum Burst Pressure		Min Bend Rad mm	Weight Kg/M
	mm	Inch		Bar	PSI	Bar	PSI		
DO10H-032	51	2	66	10	150	40	600	255	2.02
DO10H-048	76	3	92	10	150	40	600	380	3.26
DO10H-064	102	4	120	10	150	40	600	510	4.57
DO10H-080	127	5	149	10	150	40	600	635	7.12
DO10H-096	152	6	175	10	150	40	600	760	9.20
DO10H-128	203	8	234	10	150	40	600	1010	15.29
DO10H-160	254	10	288	10	150	40	600	1260	19.30
DO10H-192	305	12	343	10	150	40	600	1525	26.36

Dunlop Oil & Marine Ltd  
Jubilee Industrial Estate  
Ashington, Northumberland  
NE63 8UB United Kingdom  
[www.dunlop-oil-marine.co.uk](http://www.dunlop-oil-marine.co.uk)

**Continental**   
**CONTITECH**

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.

For complete information go to:  
[www.contitech.de/discl\\_en](http://www.contitech.de/discl_en)