


DO10S Fuel and Oil Delivery Hose

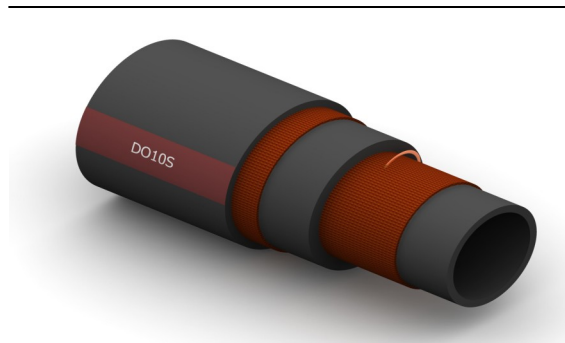

Construction:

Tube: Black NBR .

Reinforcement: High Tensile Textile Cords Plus Antistatic Wire.

Cover: Black CR/BR Blend; Abrasion, Ozone and Hydrocarbon Resistant.

Temperature Range: -30°C To +100°C.

Typical Application: Fuel Oil Delivery, with up to 50% Aromatic Content, suitable for Seawater, Mud and general offshore applications.

Branding:

Continental ContiTech DO10S OIL DELIVERY WP 10 BAR

White text on a Brown stripe

Technical Data:

Part No	Inside Dia		O.D. mm	Working Pressure		Minimum Burst Pressure		Min Bend Rad mm	Weight Kg/M
	mm	Inch		Bar	PSI	Bar	PSI		
DO10S-032	51	2	67	10	150	40	600	306	1.80
DO10S-048	76	3	92	10	150	40	600	456	2.60
DO10S-064	102	4	119	10	150	40	600	612	4.11
DO10S-080	127	5	145	10	150	40	600	762	5.17
DO10S-096	152	6	172	10	150	40	600	912	6.77
DO10S-128	203	8	225	10	150	40	600	1260	10.0

Dunlop Oil & Marine Ltd
Jubilee Industrial Estate
Ashington, Northumberland
NE63 8UB United Kingdom
www.dunlop-oil-marine.co.uk

Continental 
CONTITECH

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.
For complete information go to:
www.contitech.de/discl_en