


PW10H Potable Water Suction and Delivery

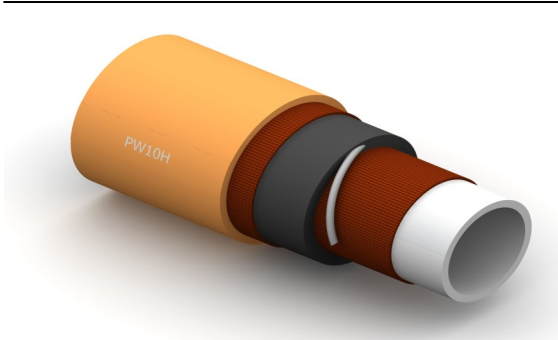

Construction:

Tube: White NR.

Reinforcement: High Tensile Textile Cords with Double Embedded Steel Helix Wire.

Cover: Orange CR; Weather and Ozone Resistant.

Temperature Range: -40°C To +80°C.

Typical Application: Potable Water Transfer.

Branding:

Continental ContiTech **PW10H POTABLE WATER SUCTION & DELIVERY WP 10 BAR**

White text

Technical Data:

Part No	Inside Dia		O.D. mm	Working Pressure		Minimum Burst Pressure		Min Bend Rad mm	Weight Kg/M
	mm	Inch		Bar	PSI	Bar	PSI		
PW10H-032	51	2	65	10	150	40	580	504	2.24
PW10H-064	102	4	120	10	150	40	580	816	5.40

Dunlop Oil & Marine Ltd
Jubilee Industrial Estate
Ashington, Northumberland
www.dunlop-oil-marine.co.uk

Continental 
CONTITECH

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.
For complete information go to:
www.contitech.de/discl_en