


# UP16H Chemical Suction and Delivery Hose

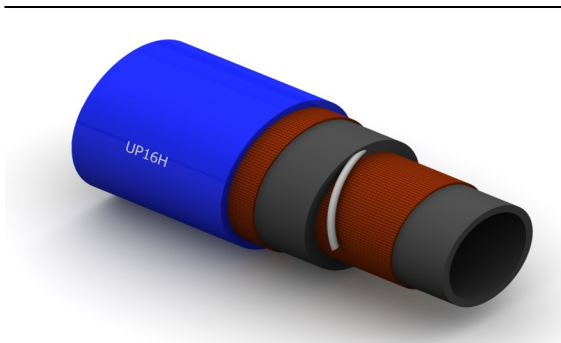

## Construction:

**Tube:** Transparent UHMWPE (Ultra High Molecule Weight Polyethylene). FDA approved

**Reinforcement:** High Tensile Textile Cords with Embedded Helix Wire.

**Cover:** Blue EPDM; Abrasion and Ozone Resistant.

**Temperature Range:** -40°C To +80°C.

**Typical Application:** Acid and Chemical suction and delivery suitable for 98% of existing Chemicals.

## Branding:

**Continental ContiTech UP16H CHEMICAL SUCTION & DELIVERY WP 16 BAR**

White text

## Technical Data:

Part No	Inside Dia		O.D. mm	Working Pressure		Minimum Burst Pressure		Min Bend Rad mm	Weight Kg/M
	mm	Inch		Bar	PSI	Bar	PSI		
UP16H-016	25	1	37	16	232	64	928	150	0.76
UP16H-024	38	1½	51	16	232	64	928	225	1.35
UP16H-032	51	2	65	16	232	64	928	275	1.91
UP16H-048	76	3	92	16	232	64	928	380	3.19
UP16H-064	102	4	124	16	232	64	928	510	5.78

Dunlop Oil & Marine Ltd  
Jubilee Industrial Estate  
Ashington, Northumberland  
NE63 8UB United Kingdom  
[www.dunlop-oil-marine.co.uk](http://www.dunlop-oil-marine.co.uk)

**Continental**   
**CONTITECH**

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.  
For complete information go to:  
[www.contitech.de/discl\\_en](http://www.contitech.de/discl_en)