


XL16H Chemical Suction and Delivery Hose

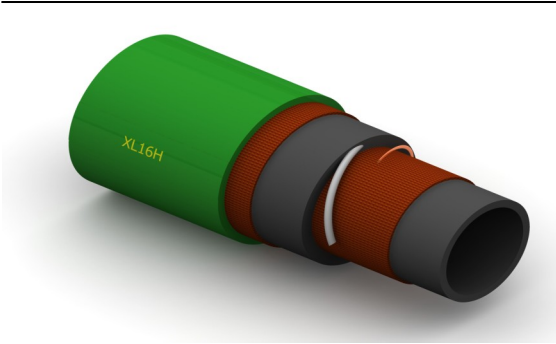

Construction:

Tube: Translucent XLPE.

Reinforcement: High Tensile Textile Cord with Embedded Steel Helix Wire and Anti Static Wire.

Cover: Green EPDM; Abrasion, Ozone and Weather Resistant.

Temperature Range: -30°C To +65°C.

Typical Application: Acid and Chemical suction and delivery suitable for 98% of existing Chemicals.

Branding:

Continental ContiTech **XL16H CHEMICAL SUCTION & DELIVERY WP 16 BAR**

Yellow text

Technical Data:

| Part No | Inside Dia | | O.D. mm | Working Pressure | | Minimum Burst Pressure | | Min Bend Rad mm | Weight Kg/M |
|-----------|------------|------|------------|------------------|-----|------------------------|-----|--------------------|----------------|
| | mm | Inch | | Bar | PSI | Bar | PSI | | |
| XL16H-012 | 19 | ¾ | 31 | 16 | 232 | 64 | 928 | 127 | 0.65 |
| XL16H-016 | 25 | 1 | 37 | 16 | 232 | 64 | 928 | 152 | 0.80 |
| XL16H-024 | 38 | 1½ | 51 | 16 | 232 | 64 | 928 | 305 | 1.14 |
| XL16H-032 | 51 | 2 | 67 | 16 | 232 | 64 | 928 | 381 | 1.71 |
| XL16H-048 | 76 | 3 | 91 | 16 | 232 | 64 | 928 | 660 | 3.00 |
| XL16H-064 | 102 | 4 | 124 | 16 | 232 | 64 | 928 | 864 | 6.10 |

Dunlop Oil & Marine Ltd
Jubilee Industrial Estate
Ashington, Northumberland
NE63 8UB United Kingdom
www.dunlop-oil-marine.co.uk

Continental 
CONTITECH

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.
For complete information go to:
www.contitech.de/discl_en