


4SH Four Spiral Wire Hydraulic Hose

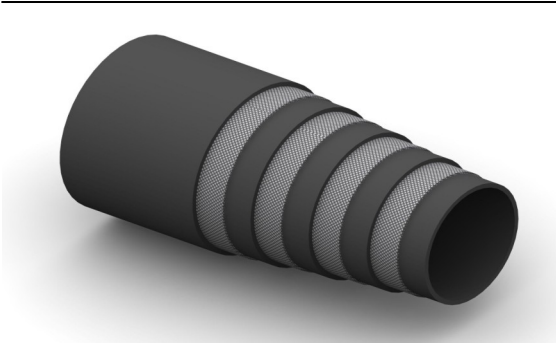

Construction:

Tube: Seamless Synthetic Rubber.

Reinforcement: 4 Spirals of High Tensile Wire.

Cover: Black Synthetic Rubber; Weather, Oil, Fuel and Abrasion Resistant.

Temperature Range: -40°C To +100°C.
(+120°C Intermittent)

Meets or exceeds the requirements of EN 856 4SH and ISO 3862
Meets flame resistance acceptance designation US MSHA IC – 152/1 & LOBA

Technical Data:

Part No	Inside Dia		O.D. mm	Working Pressure		Minimum Burst Pressure		Min Bend Rad mm	Weight Kg/M
	mm	Inch		Bar	PSI	Bar	PSI		
4SH-12	19.0	3/4	32	420	6090	1680	24360	280	1.53
4SH-16	25.4	1	39	380	5510	1520	22040	340	2.06
4SH-20	32.0	1.1/4	46	345	5000	1380	20000	460	2.46
4SH-24	38.0	1.1/2	54	290	4200	1160	16820	560	3.35
4SH-32	50.8	2	68	250	3625	1000	14500	700	4.55

Dunlop Oil & Marine Ltd
Jubilee Industrial Estate
Ashington, Northumberland
NE63 8UB United Kingdom
www.dunlop-oil-marine.co.uk

Continental 
CONTITECH

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.
For complete information go to:
www.contitech.de/discl_en