


R13 Four or Six Spiral Wire Hydraulic Hose

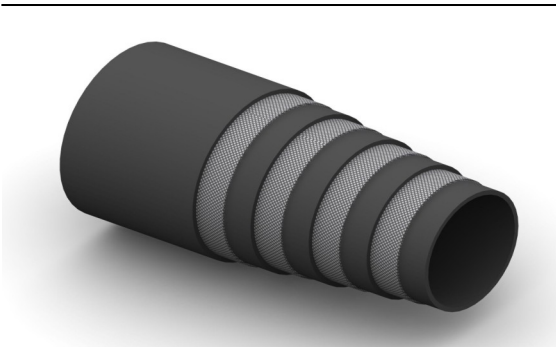

Construction:

Tube: Seamless Synthetic Rubber.

Reinforcement: 4 or 6 Spirals of High Tensile Wire.

Cover: Black Synthetic Rubber; Weather, Oil, Fuel and Abrasion Resistant.

Temperature Range: -40°C To +121°C.

Meets or exceeds the requirements of SAE J517 100 R13 – EN 856 R13 - ISO 3862
Meets flame resistance acceptance designation US MSHA IC - 152/1

Technical Data:

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		Bar	PSI	Bar	PSI		
R13-16	25.4	1	39.2	345	5000	1380	20000	300	2.25
R13-20	31.8	1.1/4	49.8	345	5000	1380	20000	420	3.60
R13-24	38.1	1.1/2	57.3	345	5000	1380	20000	500	4.75
R13-32	50.8	2	71.9	345	5000	1380	20000	630	6.90

Dunlop Oil & Marine Ltd
Jubilee Industrial Estate
Ashington, Northumberland
NE63 8UB United Kingdom
www.dunlop-oil-marine.co.uk

Continental 
CONTITECH

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.
For complete information go to:
www.contitech.de/discl_en