


# MP20S Multipurpose Hose

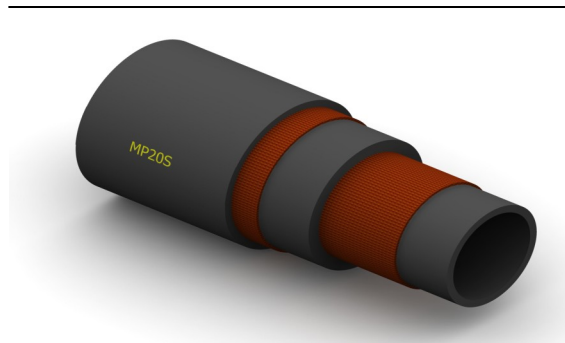

## Construction:

**Tube:** Black EPDM.

**Reinforcement:** High Tensile Textile Cords.

**Cover:** Black EPDM; Abrasion and Ozone Resistant.

**Temperature Range:** -40°C To +100°C.

**Typical Application:** Water, Seawater, Hot Water & Steam.

## Branding:

**Continental** ContiTech MP20S MULTIPURPOSE DELIVERY WP 20 BAR

Yellow text

## Technical Data:

Part No	Inside Dia		O.D. mm	Working Pressure		Minimum Burst Pressure		Min Bend Rad mm	Weight Kg/M
	mm	Inch		Bar	PSI	Bar	PSI		
MP20S-006	10	3/8	17	20	300	60	900	60	0.29
MP20S-008	13	1/2	21	20	300	60	900	78	0.47
MP20S-012	19	3/4	28	20	300	60	900	114	0.66
MP20S-016	25	1	35	20	300	60	900	150	0.80
MP20S-024	38	1.1/2	52	20	300	60	900	228	1.34
MP20S-032	51	2	70	20	300	60	900	306	1.87

Dunlop Oil & Marine Ltd  
Jubilee Industrial Estate  
Ashington, Northumberland  
NE63 8UB United Kingdom  
[www.dunlop-oil-marine.co.uk](http://www.dunlop-oil-marine.co.uk)

**Continental**   
**CONTITECH**

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.  
For complete information go to:  
[www.contitech.de/discl\\_en](http://www.contitech.de/discl_en)