


BM10S Bulk Material Delivery Hose

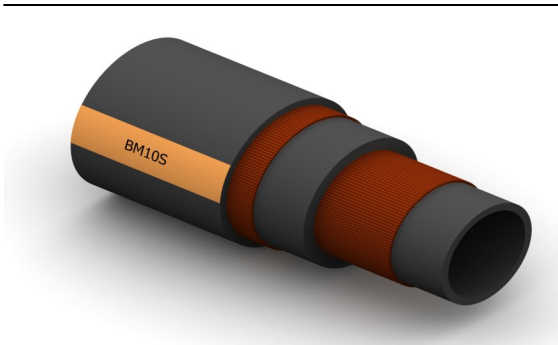

Construction:

Tube: Black SBR/NR Blend. Abrasion Resistant .

Reinforcement: High Tensile Textile Cords.

Cover: Black IR/BR Blend; Abrasion and Ozone Resistant.

Temperature Range: -35°C To +85°C.

Typical Application: Bulk Material Delivery. Specially designed for heavy duty Barite and Cement delivery to offshore platforms.

Branding:

Barite Service:

Continental ContiTech BM10S BULK MATERIAL DELIVERY WP 10 BAR

Black text on an Orange stripe

Cement Service:

Continental ContiTech BM10S BULK MATERIAL DELIVERY WP 10 BAR

Black text on a Yellow stripe

Technical Data:

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		Bar	PSI	Bar	PSI		
BM10S-064	102	4	124	10	150	40	600	612	4.70
BM10S-080	127	5	149	10	150	40	600	762	6.21

Dunlop Oil & Marine Ltd
Jubilee Industrial Estate
Ashington, Northumberland
NE63 8UB United Kingdom
www.dunlop-oil-marine.co.uk

Continental 
CONTITECH

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.
For complete information go to:
www.contitech.de/discl_en